


## ТРОЙНИК НЕРЖАВЕЮЩИЙ

### Описание

1. Тройники под сварку.
2. Тройники согласно стандарту ISO/SMS/DIN 11850.
3. Сделаны из нержавеющей стали AISI304/AISI316.

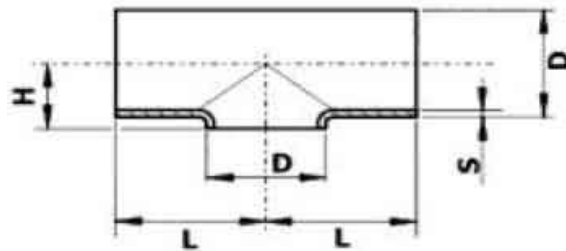

### ТАБЛИЦА С РАЗМЕРАМИ

| D, мм | L, мм | H, мм | S, мм   |
|-------|-------|-------|---------|
| 12    | 25,5  | 10    | 1,5-2,0 |
| 17,2  | 25,5  | 10    | 1,5-2,0 |
| 18    | 25,5  | 10    | 1,5-2,0 |
| 21,3  | 25,5  | 12    | 1,5-3,0 |
| 22    | 25,5  | 13    | 1,5-2,0 |
| 25    | 28,5  | 15    | 1,5-3,0 |
| 26,9  | 28,5  | 15    | 1,5-3,0 |
| 28    | 28,5  | 15    | 1,5-3,0 |
| 33,7  | 38    | 19    | 1,5-4,0 |
| 34    | 38    | 20    | 1,5-3,0 |
| 38    | 47,5  | 21    | 1,2-3,0 |
| 40    | 47,5  | 22    | 1,5-4,0 |
| 42,4  | 47,5  | 23    | 1,5-4,0 |
| 43    | 47,5  | 23    | 1,5-3,0 |
| 48,3  | 57    | 26    | 1,5-4,0 |
| 50,8  | 57    | 27    | 1,2-3,0 |
| 52    | 63,5  | 29    | 1,5-3,0 |
| 60,3  | 63,5  | 33    | 1,5-4,0 |
| 63,5  | 63,5  | 34    | 1,5-4,0 |
| 70    | 76    | 38    | 2,0-4,0 |

| D, мм | L, мм | H, мм | S, мм   |
|-------|-------|-------|---------|
| 76,1  | 76    | 41    | 1,5-4,0 |
| 84    | 85,5  | 45    | 2,0-3,0 |
| 88,9  | 85,5  | 47    | 2,0-4,0 |
| 101,6 | 105   | 56    | 2,0-6,0 |
| 104   | 105   | 56    | 2,0-6,0 |
| 114,3 | 109   | 61    | 2,0-6,0 |
| 129   | 124   | 74    | 2,0-6,0 |
| 139,7 | 124   | 74    | 2,0-6,0 |
| 154   | 143   | 80    | 2,0-6,0 |
| 168,3 | 143   | 89    | 2,0-6,0 |
| 204   | 178   | 110   | 2,0-6,0 |
| 219,1 | 178   | 116   | 2,0-6,0 |
| 254   | 250   | 138   | 2,0-6,0 |
| 273   | 250   | 150   | 2,0-6,0 |
| 304   | 300   | 165   | 2,0-6,0 |
| 323,9 | 300   | 177   | 2,0-6,0 |
| 354   | 350   | 192   | 2,0-6,0 |
| 355,6 | 350   | 195   | 3,0-6,0 |
| 406,4 | 400   | 223   | 3,0-6,0 |